

DR86A

Extra Heavy Duty Machine Tool Encoder



Features

Model DR86A is an extra heavy duty unit which employs a highly reliable Opto-ASIC encoder module mounted within a rugged mechanical housing. The heavy duty sealed bearings, together with double O-ring sealing makes this encoder a serious and reliable alternative to a wide range of machine tool encoders, and at an advantageous price.

Common Applications

Motion Control Feedback, Conveyors, Elevator Controls, Machine Control, Food Processing, Process Control, Robotics, Material Handling, Textile Machines

Replaces

Fanuc, Sumtak, Tamagawa, Koyo, Kwangwoo

Order Number

CPR

DR86A-01

1024

The Accu-Coder™ DR86A Features:

- Rugged All Metal Housing
- 68 mm Flange Mount
- 1024 CPR*
- 17-Pin MS Style Connector
- IP65 Double O-ring Seal
- Line Driver Output
- 15 mm Stainless Steel Shaft

*Other CPR's may be available. Contact Customer Service.

The Accu-Coder™ Advantage

- Get this encoder **FAST!**
- **Huge savings** in price comparison!
- The accuracy, reliability, and quality that only come from an Accu-Coder™
- Industry Best **3-year** warranty!

DR86A

Extra Heavy Duty Machine Tool Encoder

Model 86A Specifications

Electrical


Input Voltage4.75 to 24 VCC max for temperatures up to 70° C
 Input Current100 mA max with no output load
 Input Ripple100 mV peak-to-peak at 0 to 100 kHz
 Output FormatIncremental- Two square waves in quadrature with channel A leading B for clockwise shaft rotation, as viewed from the encoder mounting face. See Waveform Diagrams below.
 Output Types.....Line Driver- 20 mA max per channel (Meets RS 422 at 5 VCC supply)
 IndexOccurs once per revolution. The index is Ungated. See Waveform Diagrams below.
 Freq ResponseUp to 100 KHz
 Noise ImmunityTested to BS EN61000-4-2; IEC801-3; BS EN61000-4-4; DDENV 50141; DDENV 50204; BS EN55022 (with European compliance option); BS EN61000-6-2; BS EN50081-2
 Symmetry180° (±18°) electrical at 100 kHz output
 Quad Phasing1 to 2540 PPR: 90° (±22.5°) electrical at 100 kHz output
 Min Edge Sep1 to 2540 PPR: 67.5° electrical at 100 kHz output
 Rise TimeLess than 1 microsecond
 AccuracyInstrument and Quadrature Error: For 1024CPR, 0.017° mechanical (1.0 arc minutes) from one cycle to any other cycle

Mechanical



Max Shaft Speed3600 RPM. Higher shaft speeds may be achievable, contact Customer Service
 Shaft Size15 mm
 Shaft Material303 stainless steel
 Shaft RotationBi-directional
 Radial Shaft Load.....35 kg max
 Axial Shaft Load35 kg max
 Starting Torque2.118 x 10⁻² Nm typical
 Max Acceleration1 x 10⁵ rad/sec²
 Electrical Conn17-pin MS Style
 HousingAnodized Aluminium
 BearingsPrecision ABEC ball bearings
 MountingSquare Flange with 4 Holes 5.50 mm Dia on a 71.19 mm Bolt Circle (B.C.)
 Weight800 gms typical

Environmental

Operating Temp.....0° to 70° C
 Storage Temp-25° to +85° C
 Humidity.....95% RH non-condensing
 Vibration10 g @ 58 to 500 Hz
 Shock50 g @ 11 ms duration
 SealingIP65

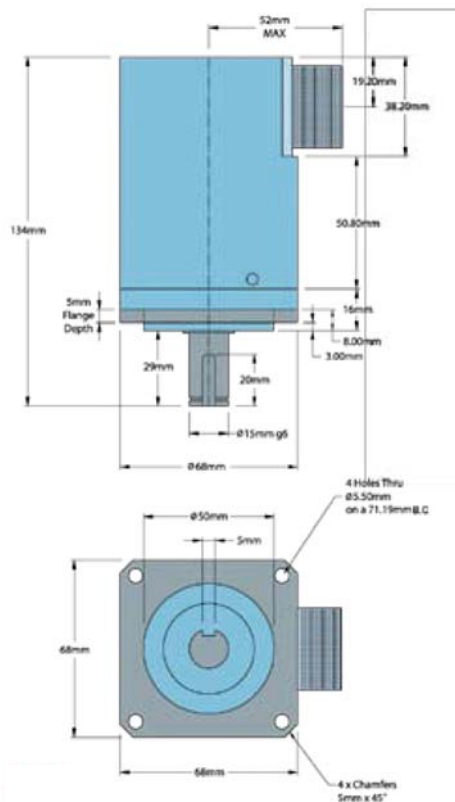

Waveform Diagrams

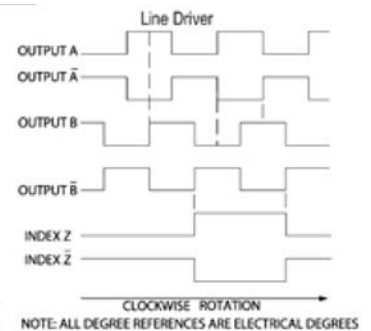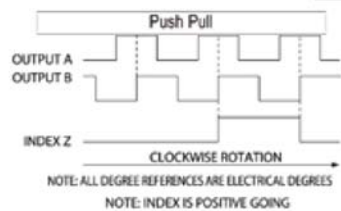

Wiring Table

17-Pin Conn	Function
A	A
B	Z
C	B
D	---
E	---
F	---
G	---
H	+VCC
J	---
K	0 Volts
L	---
M	---
N	A'
P	Z'
R	B'
S	---
T	---