

MODEL MA36S – MULTITURN ABSOLUTE ENCODER



Ø36 mm

FEATURES

- Standard Size 36 mm Package (1.42")
- Durable Magnetic Technology
- Multiturn Absolute Encoder (12 Bit/40 Bit)
- SSI and CANopen Communications
- Proven New Turns Counting Technology—No Gears or Batteries


The Model MA36S Multiturn Absolute Accu-Coder™ is ideal for a wide variety of industrial applications that require an encoder with the capability of absolute positioning output, even in power off scenarios. Its fully digital output and innovative use of battery-free multiturn technology make the Model MA36S an excellent choice for all applications, especially ones with a high presence of noise. Its durable magnetic technology and high IP rating make it a perfect choice for dirty industrial environments. Available with a 6 mm or 1/4" shaft and a servo mount, the Model MA36S is easily designed into a variety of applications.

COMMON APPLICATIONS

- Robotics, Telescopes, Antennas, Medical Scanners, Windmills, Elevators, Lifts, Motors, Automatic Guided Vehicles, Rotary and X/Y Positioning Tables

MODEL MA36S ORDERING GUIDE

Blue type indicates price adder options. Not all configuration combinations may be available. Contact Customer Service for details. For single turn applications see Model SA36S.

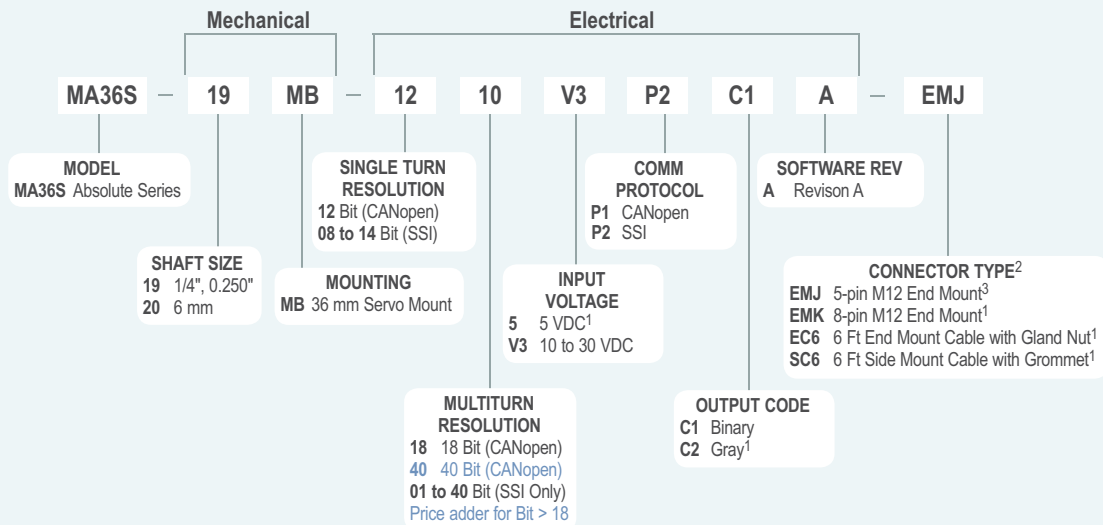

NOTES:

- Available with SSI only.
- For mating connectors, cables, and cordsets see Encoder Accessories on page 102 or visit www.encoder.com. For Pin Configuration Diagrams, see page 107 or visit www.encoder.com.
- Available with CANopen only.

Please note that configuration options for this product have changed. Confirm configuration options before ordering or contact Customer Service for assistance.

MODEL MA36S SPECIFICATIONS

Electrical

Input Voltage 10 to 30 VDC max SSI or CANopen
 5 VDC SSI Only
 Input Current 50 mA max with no external load
 Power Consumption 0.5 W max

Resolution

(Single) 12 bit (CANopen)
 8 to 14 bit (SSI)
 Resolution (Multi).... Up to 40 bit multiturn (CANopen or SSI)
 Accuracy +/- 0.35°
 Repeatability +/- 0.2°

CANopen Interface

Protocol.....CANopen:
 Communication profile CIA 301
 Device profile for encoder CIA 406 V3.2 class C2
 Node Number 0 to 127 (default 127)
 Baud Rate.....10 Kbaud to 1 Mbaud with automatic bit rate detection

Note: The standard settings as well as any customization in the software can be changed via LSS (CIA 305) and the SDO protocol (e.g. PDOs, scaling, heartbeat, node-ID, baud rate, etc.)

Programmable CANopen Transmission Modes

Synchronous.....When a synchronization telegram (SYNC) is received from another bus node, PDOs are transmitted independently
 Asynchronous.....A PDO message is triggered by an internal event (e.g. change of measured value, internal timer, etc.)

SSI Interface

Clock Inputvia opto coupler
 Clock Frequency.....100KHz to 500KHz
 Data OutputRS485 / RS422 compatible
 Output CodeGray or binary
 SSI OutputAngular position value
 Parity Bit.....Optional (even/odd)
 Error BitOptional
 Turn On Time<1.5 sec
 Pos. Counting Dir.....Connect DIR to GND for CW
 Connect DIR to VDC for CCW
 (when viewed from shaft end)
 Set to Zero.....Apply VDC for 2 sec
 ProtectionGalvanic Isolation


Mechanical

Max Shaft Speed.....12,000 RPM
 Radial Shaft Load 7 lb (32 N) = bearing life 1.10¹⁰ revs
 3.6 lb (16 N) = bearing life 1.10¹¹ revs
 Axial Shaft Load 5 lb (20 N) = bearing life 1.10¹⁰ revs
 2.3 lb (10 N) = bearing life 1.10¹¹ revs
 Starting Torque<0.45 oz-in typical
 HousingFerrous chrome-plated magnetic screening
 Weight.....5 oz typical

Environmental

Storage Temp-40° to +100° C
 Humidity.....95% RH non-condensing
 Vibration.....5 g @ 10 to 2000 Hz
 Shock.....100 g @ 6 ms duration
 SealingIP67, shaft sealed to IP65

MODEL MA36S SOLID SHAFT

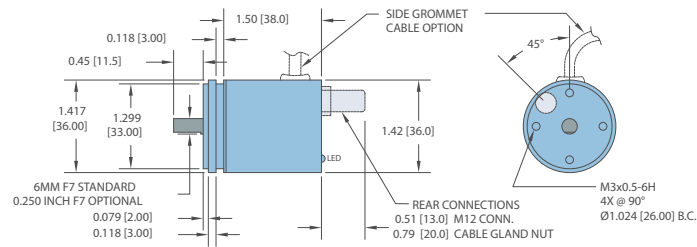

All dimensions are in inches with a tolerance of +0.005" or +0.01" unless otherwise specified. Metric dimensions are given in brackets [mm].

WIRING TABLES

SSI ENCODERS		
Function	Cable† Wire Color	8-pin M-12
Ground (GND)	White	1
+VDC	Brown	2
SSI CLK+	Green	3
SSI CLK-	Yellow	4
SSI DATA+	Gray	5
SSI DATA-	Pink	6
PRESET	Blue	7
DIR	Red	8
Shield	Side - Exit Housing End - Exit N/C	Housing

CANOPEN ENCODERS	
Function	Pin
+VDC	2
Ground (GND)	3
CAN _{High}	4
CAN _{Low}	5
CAN _{GND / Shield}	1

†Standard cable is 24 AWG conductors with foil and braid shield.